




- Monolithic inorganic material construction.
 - Closed magnetic circuit avoids crosstalk.
 - Suitable for reflow soldering.
 - Available in various sizes.
 - Quantity: 10000pcs
-
- Data lines and low power line
 - Connection between digital and analog circuit

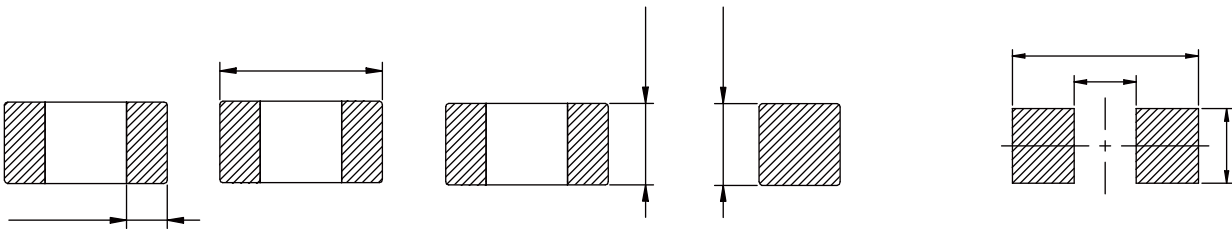

Part No	Impedance @100MHz (Ω)	Tolerance	DCR (max) (Ω)	Temperature Rise Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		

Operating Temperature: -55 °C ~ +125 °C

Temperature rise current the actual value of DC current when the temperature rise is ΔT40 °C

