


MDA Series







FEATURES










- Shielded construction
-
-
-
- Ultra low buzz noise, due to composite construction.
-
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 500PCS


APPLICATION


- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
-
- In-Vehicle Infotainment and navigation

[illegible]


△

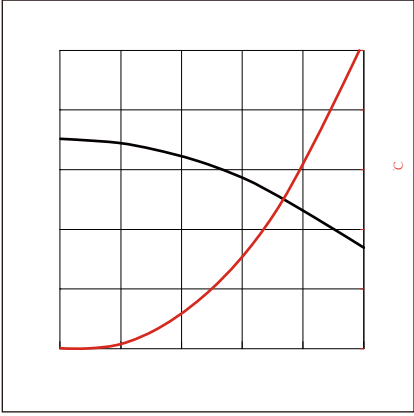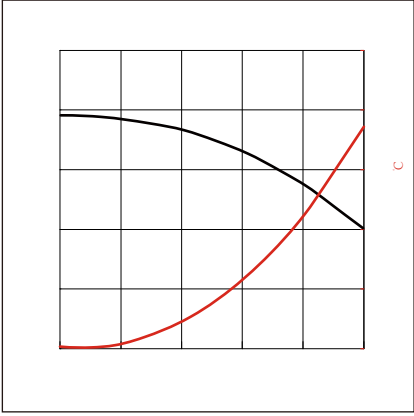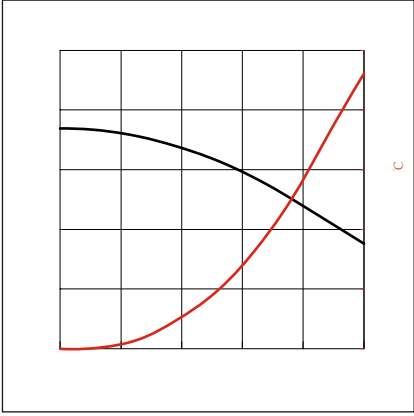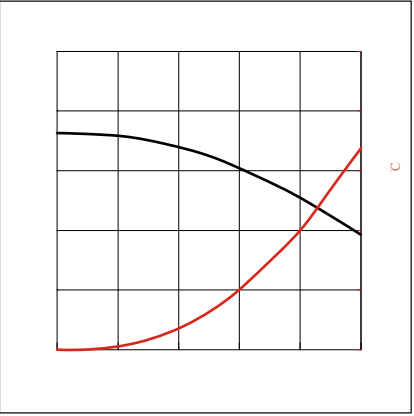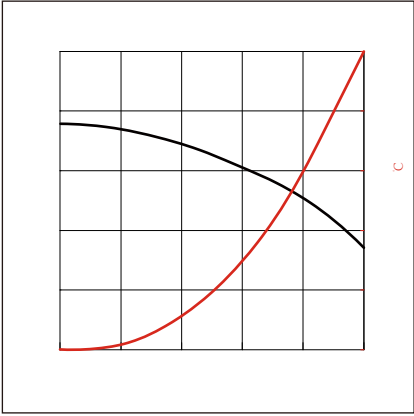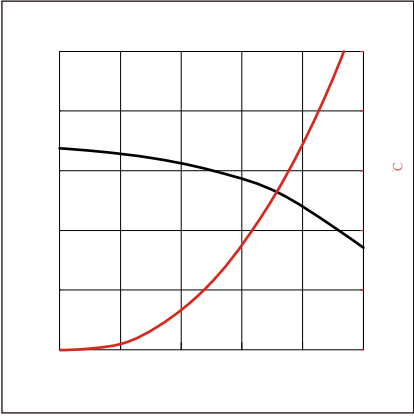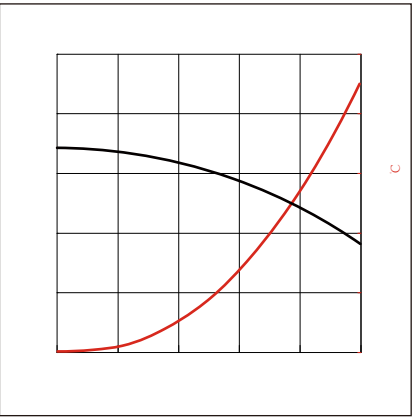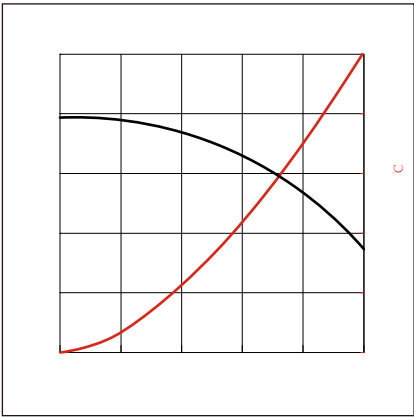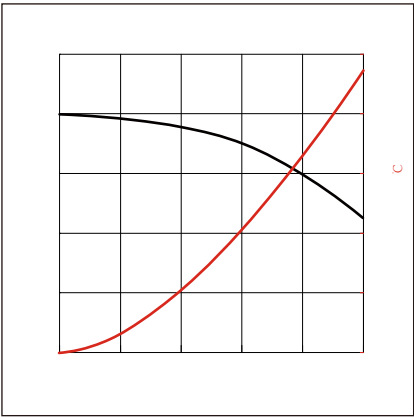

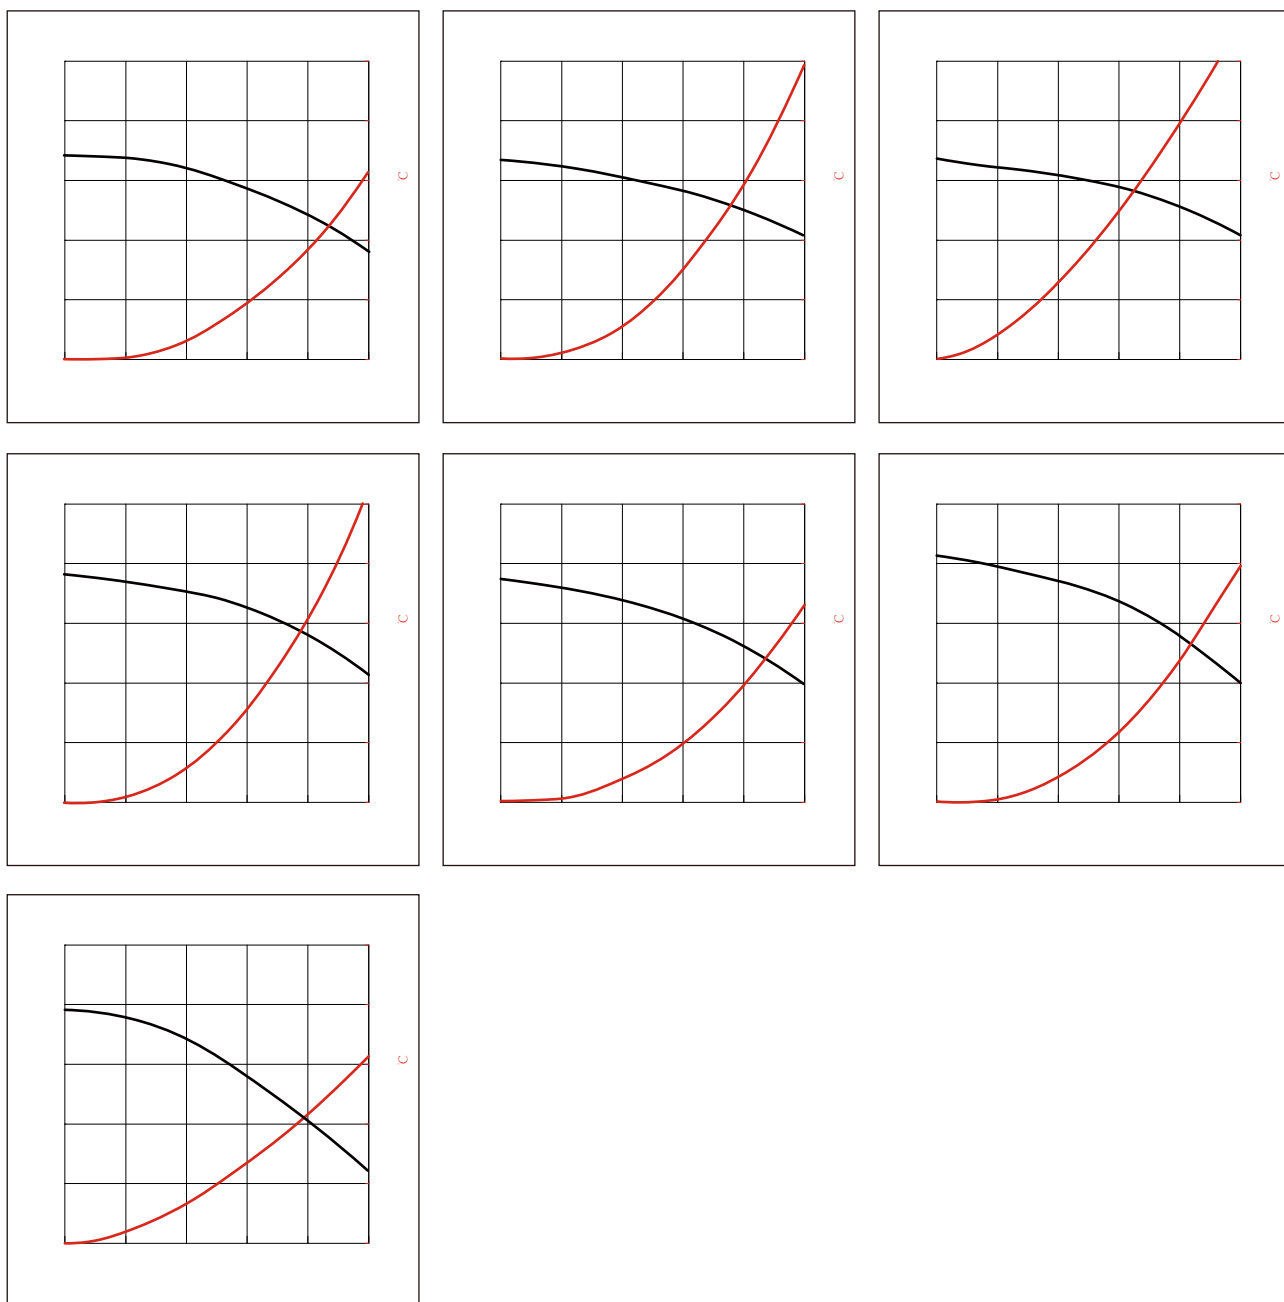


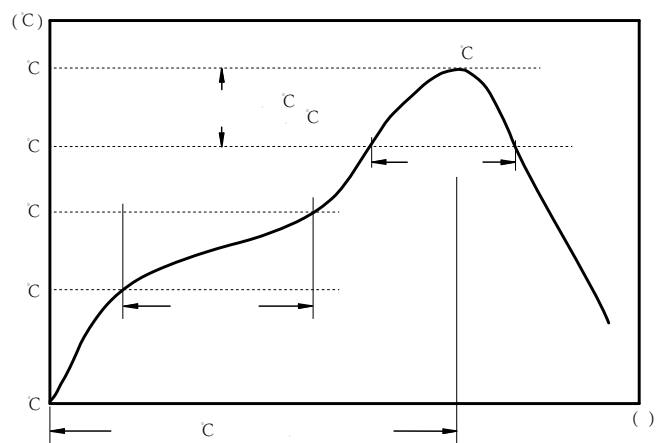

:


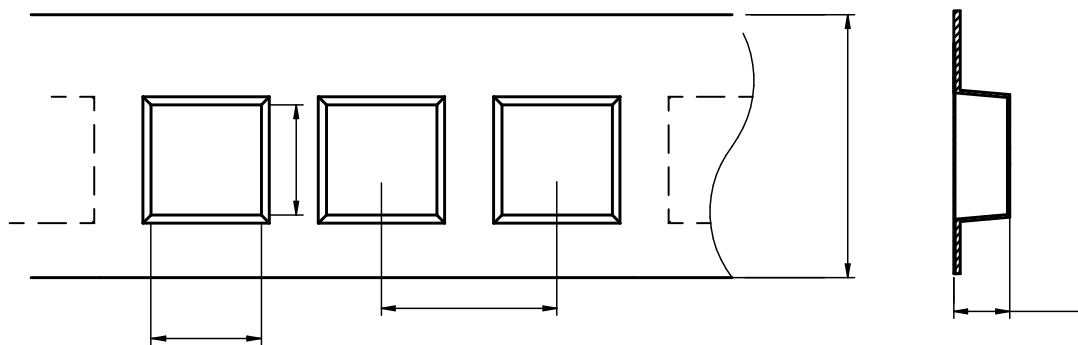


MDA1050	10.4 ± 0.1	11.6 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	16.0 ± 0.1	24.0 ± 0.3	5.4 ± 0.1	1.75 ± 0.1	0.40 ± 0.05

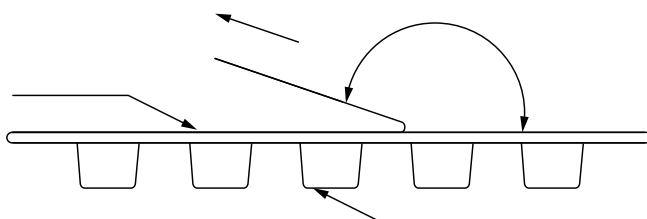


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	KH+Printing Inductance+period)
---------	--------------------------------

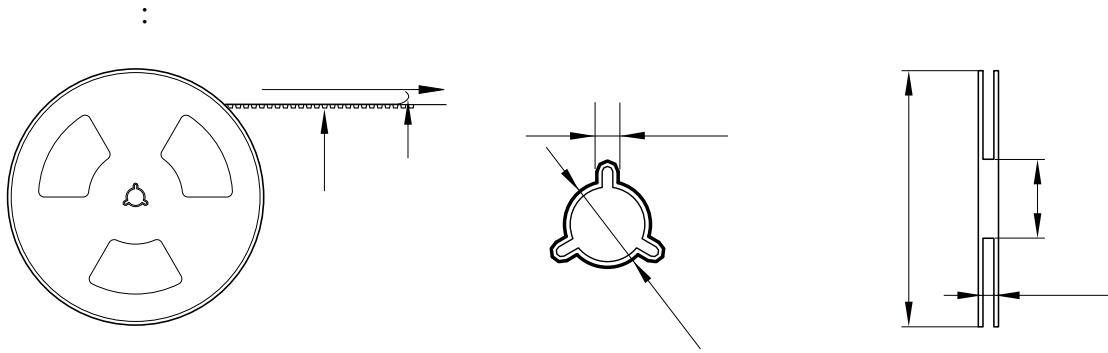

500 Pcs/Reel



2 Reel /Inner box(1000 Pcs)



3 Inner box/Carton box(3K Pcs)

-
-
-
-
-
-
-
-