


MDE Series




FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 °C
- Low core loss
-
- Halogen Free & ROHS compliant
-
-

APPLICATION

-
- Switch and servers
-
-
-
- SSD modules

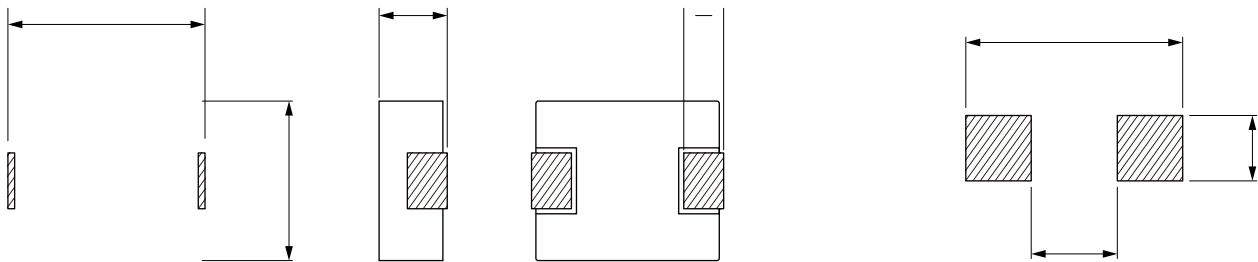

Part No	Inductance @ 100kHz/1V	Tolerance	DC Resistance Max.	Current Typ. (A)	Temperature Rise Current Typ. (A)
				16.5	
			11.8		

Part No	Inductance @ 100kHz/1V	Tolerance	DC Resistance Max.	Current Typ. (A)	Temperature Rise Current Typ. (A)
			145		
			195		

△

