






▪ High saturation current realized by material properties


-
-
-
-
-
-
-
-
-




Part No	Inductance @ 1MHz/1V	Tolerance	DC Resistance Typ.	DC Resistance Max.	Current Typ.	Current Max.	Temperature Rise Current Typ.	Temperature Rise Current Max.

Temperature rising current will cause the coil temperature approximate $\Delta T 40^{\circ}\text{C}$
 Saturation current will cause to drop approximately 30 %

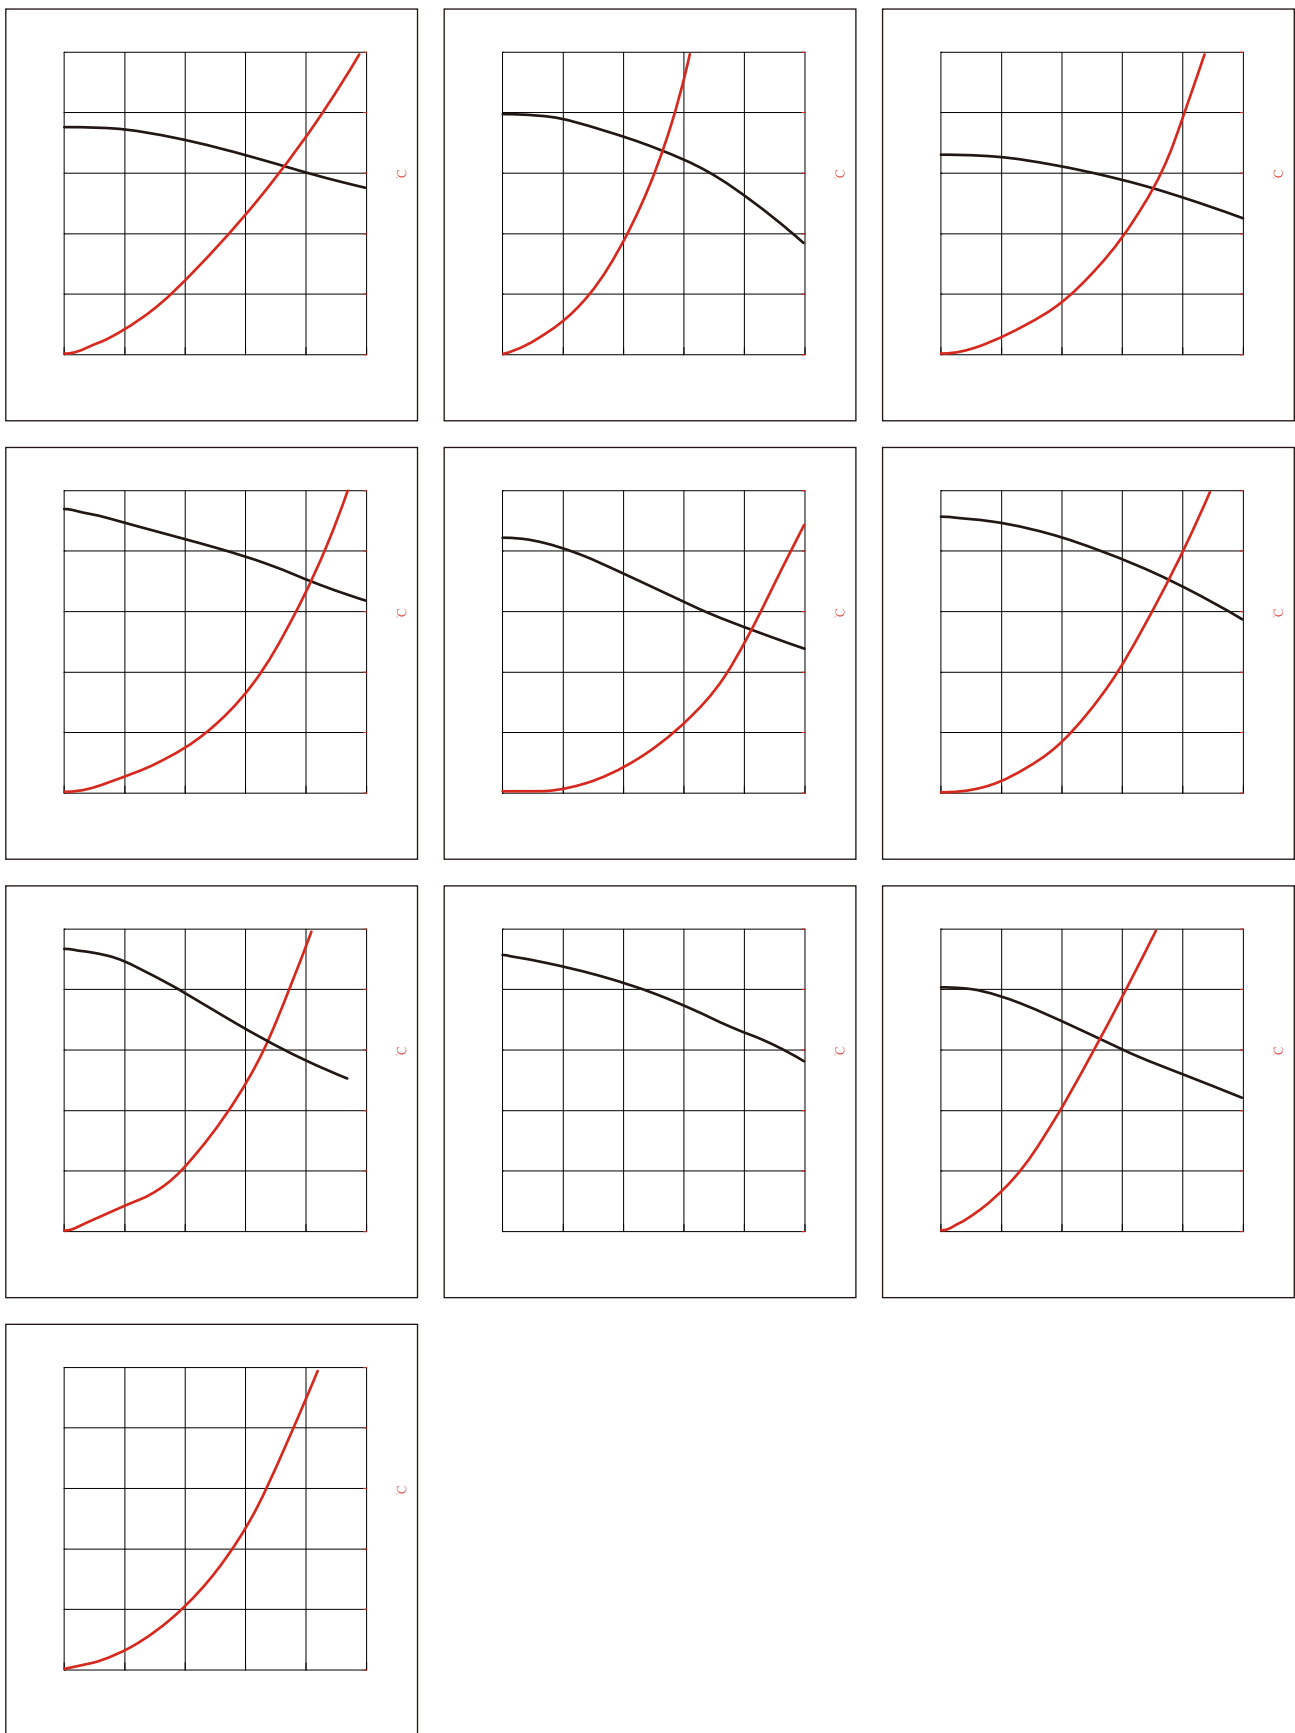


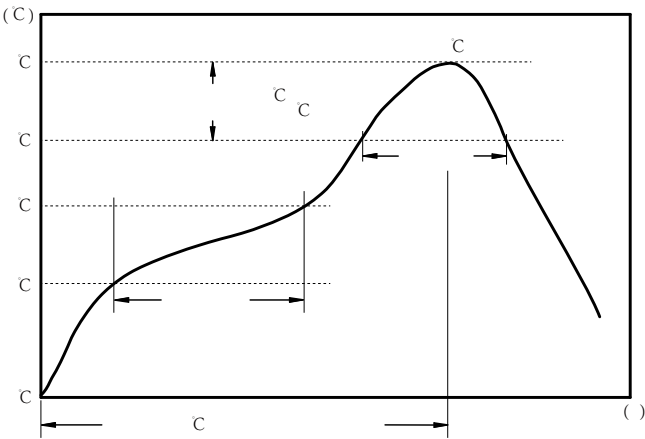



:

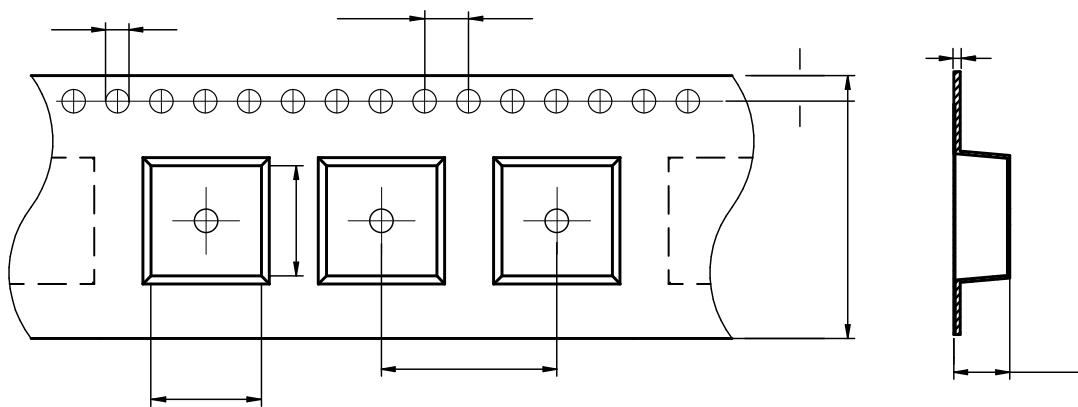

MDE252010S	2.25 ± 0.05	2.8 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	1.35 ± 0.1	1.75 ± 0.1	0.22 ± 0.05

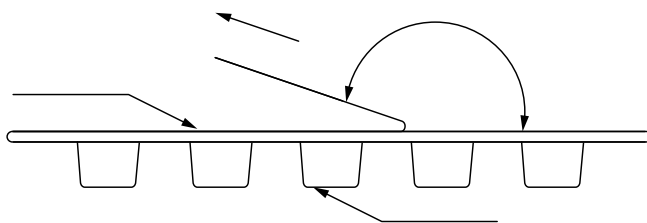


The peel force of top cover tape shall be between 0.1 to 1.3 N

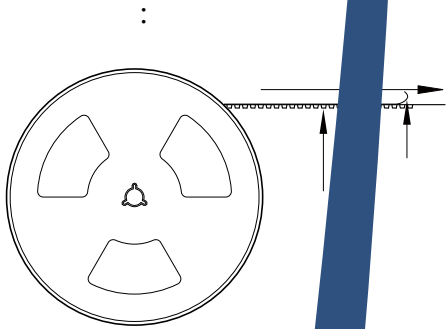

3000 Pcs/Reel

5 Reel /Inner box(15K Pcs)



8 Inner box/Carton box(120K Pcs)

:

•

•

•

•

•

•

•

•