


MDPU Series
Molding SMD Power Inductors







FEATURES

-
-
-
-
-
-





APPLICATION

-
-
-
-


Dimensions: [mm]




6 X 1



Electrical Properties:



Soldering Reflow:

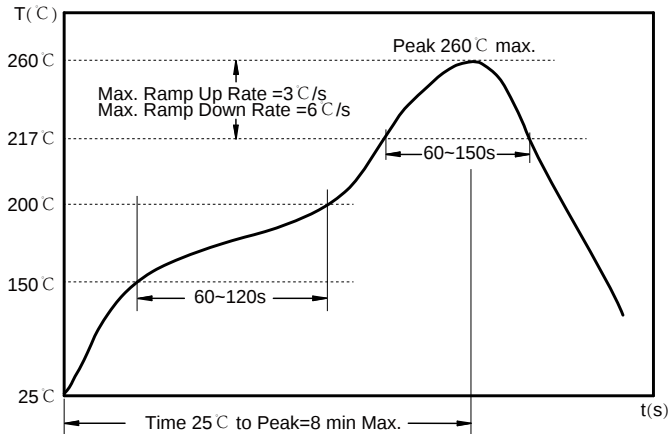

Preheat condition: 150 ~200 / 60~120 sec.


Allowed time above 217 : 60~150 sec.

Max temperature: 260 .

Time within 5 of actual Peak Temperature: 30 sec max.

Packaging Information:

Tape Dimension: [mm]

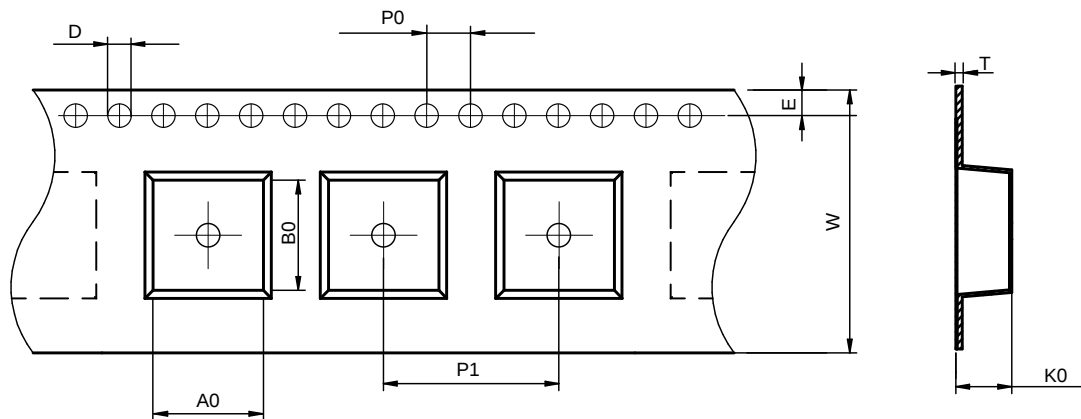

Series	D typ.	P0 typ.	P1 typ.	W typ.	E typ.	A0 typ.	B0 typ.	K0 typ.	T typ.

Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

