


SMD Power Inductor
Size 3225

-
-
-

-
-
-


Dimensions: [mm]

Land Pattern: [mm]



Electrical Properties:

Soldering Reflow:

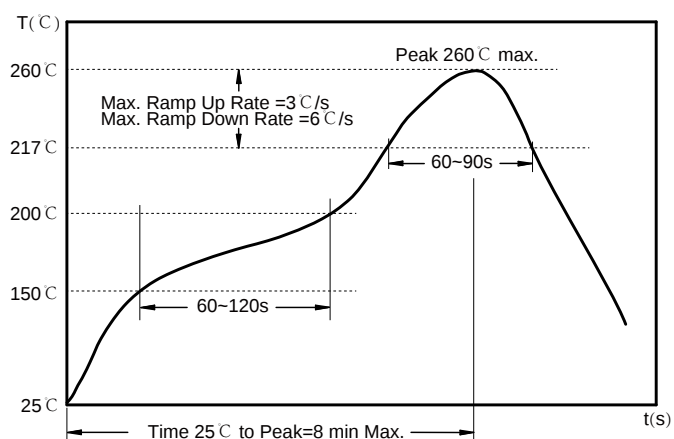


Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.

Max temperature: 260 °C .


Packaging Information:

Tape Dimension :

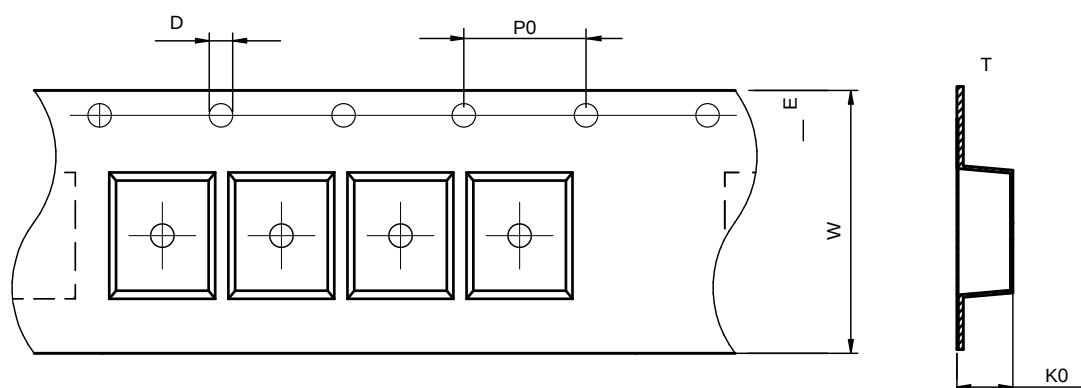

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
WI3225	2.75±0.1	3.50±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	2.3±0.1	1.75±0.1	0.25±0.03

Peel force of top cover tape:

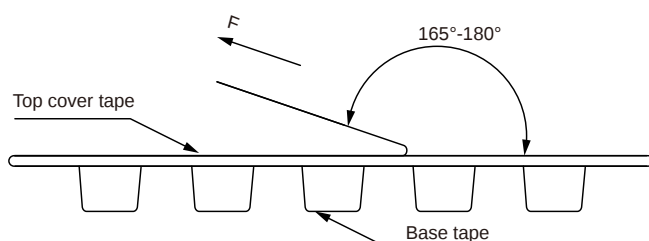

Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

Packaging Quantity:

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
-
-
-

Operation Instructions:

- -
 -
 -
-