

WWCI Series

SMD Wire Wound Ceramic Inductor Size 0603

CHARACTERISTICS


- ἡ δὲ ΧΥΘΩΣΣ ΧΥΘΥ ἡ δὲ ὕψω ἡ δὲ ὕψω {wc
- αὐτοῖς σὺ τὸ ΠΣ ΣΨ ὑψὲς ὁ ὕψω ὕψω ὕψω
- {ψΥΠΠ ὕψω ὕψω σψΥΠΠ ὑψὲς ὁ ὕψω ὕψω τὸ ΠΣ
- νῦν τὸ ὕψω ὕψω ὕψω

APPLICATION

- IC 4μm² 170nm

Dimensions: [mm]

Land Pattern: [mm]

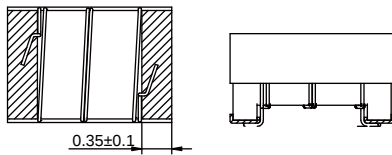


Electrical Properties:

		Condi on				(Ω)	
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	bD			%			
' ' /L	bW			%			
' ' /L	w W			%			
' ' /L	w D			%			
' ' /L	w W			%			
' ' /L	w W			%			
' ' /L	w D			%			
' ' /L	w W			%			
' ' /L	w W			%			
' ' /L	w W			%			
' ' /L	w W			%			
' ' /L	w W			%			

ημσφρ° ὕψμσφτῶσ ὕψ /
 εῡψμσφτῶσ οἰσ ὀησσῶ ὕψ τῶητφ φτῖψ ὕψ 5 / ὀησσῶ Χ'Ισῶ ὕψ ὕψμσφτῶσ οἰσ ησ Ε C

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

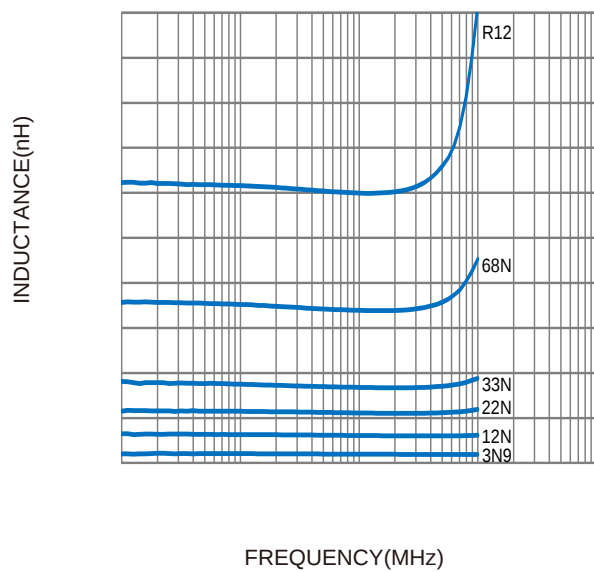

Temperture Rise VS. Frequency Characteristics:

